


# Faserwerk

## Wuthocker Aero Assembly Instructions

Congratulations on purchasing a Wuthocker Aero. Assembling it properly is important to experience the full potential of this product, and, more importantly, for a safe ride. Failing to do so might result in serious injuries or even death. Therefore, we strongly recommend having your Wuthocker Aero assembled by a qualified bicycle mechanic.

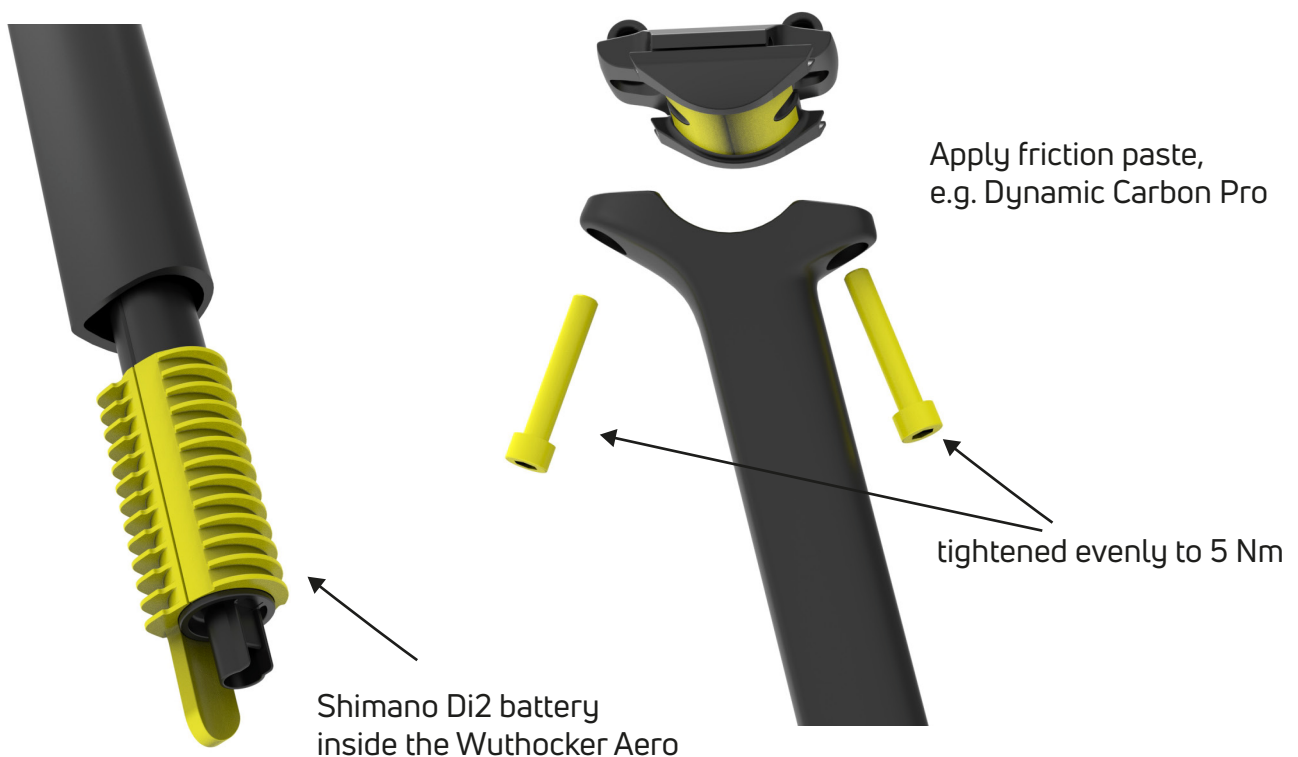

The two bolts clamping the saddle rails should be tightened evenly to 5 Nm.  
We recommend adding friction paste below the lower cradle.  
When installing the seatpost in the frame, friction paste must be applied.

A special adaptor is available to hold a Shimano Di2 battery inside the Wuthocker Aero.  
Wrap the adaptor around the battery and push it into the end of the seatpost.

### Weight Limit

This seatpost is designed and tested for a maximum total weight of 110 kg.  
(rider plus bike plus equipment)